

# 644. Mathematical models for acoustical pollution prognosis at signalized intersections

E. Jotautienė<sup>1,a</sup>, S. Merkevičius<sup>1,b</sup>

<sup>1</sup> Lithuanian University of Agriculture, Universiteto 10, LT-53361, Akademija, Kauno distr., Lithuania

**E-mail:** <sup>a</sup> *Egle.Jotautiene@lzuu.lt*, <sup>b</sup> *IFPS.katedra@lzuu.lt*

**Phone:** +37037752204; **Fax:** +37037752204

*(Received 2 March 2011; accepted 15 May 2011)*

**Abstract.** Noise related problems are increasing worldwide with detrimental effects on health and quality of life [18]. The regulations and laws of European Union and Lithuania emphasize the importance of noise reduction, the necessity to collect and disseminate information related to traffic flow, the development of traffic flow mathematical models and their implementation for noise evaluation. In this paper, mathematical methods are applied to determine the noise intensity. Measurements of urban traffic noise were performed at the arterial street intersections in Kaunas and its suburbs. At this location traffic flow rates are high and noise is dominated by low frequencies. It was determined that the  $L_{Aeq}$  levels decrease continuously till the end of cycle of the green traffic signal. The developed methodology can be used to estimate traffic noise levels in a city and country districts using data provided by the automated traffic flow registration system. The aim of the article is to develop the mathematical model of a longitudinal noise sources and to apply it for the prediction of acoustical pollution in an environment of roads and streets intersections.

**Keywords:** traffic noise, intersection, mathematical model.

## Introduction

Traffic flow patterns in cities, especially in city centers and at the arterial roads in suburbs, are intensive and uneven. In most cases the noise levels exceed allowable limits [1, 2]. The analysis of transport generated noise indicators and possible means of reducing noise levels are urgent issues in Lithuanian cities and in the entire country wide transport system.

The number of transport type vehicles in Lithuania is constantly increasing. This is particularly evident in large cities. Negative effect of transport generated noise is especially evident at streets and road intersections, where traffic density is comparatively high, the speed is low with frequent accelerations and decelerations [2-6]. The noise is more perceived to human from the traffic excited pollutant factors of psychological influence of the physical technological environment. In the living environment for this population health risk factor is characteristic the irritation and disturbing perceive of information, or also the factors making an unfavorable influence on the full sleep. The health risk by environmental noise is assessed in project stage of buildings and provided any means of noise reduction related with the noise mapping works [5, 7, 8, 9]. Fulfilling the assessment of noise influence on the environment the acoustical sound components, the radiation and damping factors are estimated. The following data is required for calculating the source level: vehicle data (number of vehicles per hour, % of heavy vehicles), speed for cars and trucks, road surface adjustments, road gradients, multiple reflection addition.

The results of scientific studies indicate [2] that the A-weighted equivalent sound pressure level  $L_{pA,eq} \geq 55$  dBA increased by 40 % in Kaunas city since 2004. The average values of  $L_{pA,eq}$  reached 72,9–79,4 dBA in the biggest cities of Lithuania. This is significantly larger than the

typical noise levels  $L_{pA,eq} = 65$  dBA in European countries (according to data of World Health Organization) and the requirements imposed by Lithuanian regulations.

The environmental regulations and legal requirements of European Union and Lithuania emphasize importance of noise reduction [10, 11]. The environmental issues, necessity to collect and store information related to traffic, introduction of traffic flow mathematical models and their implementation, and noise evaluation have been presented in many scientific papers [3, 5, 9, 12, 13, 14].

## Methodology

Depending on the sound radiated intensity and direction, the acoustic emission of continuously changing noise at different time-spans can be calculated using a specified statistical distribution of sound pressure levels [13-15]. The following simplified formula can be used to calculate the equivalent constant A-weighted sound pressure level:

$$L_{A,eq} = 10 \cdot \lg \left[ \frac{1}{T} \sum_{i=1}^n (t_i \cdot 10^{0.1 \cdot L_{A,i}}) \right] \quad (1)$$

where  $L_{A,i}$  is obtained by direct measurement of the equivalent A-weighted sound pressure level at  $i$ - time-span of  $t_i$ , or from the average A-weighted sound level at  $i$ - time-span when noise can be described as continuous (constant) at time-span  $t_i$ ;  $n$  is the number of time-spans  $t_i$  over duration  $T$ .

Depending on risk level of time acoustical characteristics (“ $d$ ” – day, “ $e$ ” – evening, “ $n$ ” – night) in a living environment, permissible sound levels ( $L_d, L_e, L_n, L_{den} \leftrightarrow L_{pA,eq}$ ) are described in a Lithuanian hygiene norm (HN 33–1–2007). In respect to this legal requirement, zones of silent agglomeration are defined.

Sometimes, the  $L_{eq}$  alone may not be sufficient to assess noise annoyance since it does not provide information on noise fluctuations. The relatively steady noise from a motorway with constant traffic density and the highly fluctuating noise from a succession of aircraft flyovers in an otherwise quiet environment may result in the same  $L_{eq}$ , but the annoyance level will probably not be the same. Attempts have been made to incorporate a “variability” factor in some noise descriptors, for example by combining  $L_{eq}$  and the standard deviation,  $\sigma$ , to give the noise pollution level,  $L_{NP}$ :

$$L_{NP} = L_{eq} + K\sigma \quad (2)$$

where  $K$  is the constant, tentatively set to 2,56.

If the distribution of the noise is Gaussian, eq.(2) may be replaced by:

$$L_{NP} = L_{eq} + (L_{10} - L_{90}) \quad (3)$$

The quantity  $L_{10}$ – $L_{90}$ , sometimes called the Noise Climate, which are the statistical levels, accordingly 10% and 90%, at investigation time  $t_i$ . Generalized statistical noise levels ( $L_5, L_{10}, L_{50}, L_{90}, L_{99}$  and etc.) are described as  $L_{AN}$  in Lithuanian Standard LST ISO 1996–1– 2004.

Finally, it should be mentioned that many different noise ratings are found for long-term aircraft noise descriptions. They are normally based on an average of the maximum levels (or on the sound exposure levels) and introduced by various adjustments such as the time of the day, number of aircraft, percentage of runway usage, etc. However, the different ratings often show good correlation with each other [16].

Using statistical traffic noise distribution level  $L_{AN}$ , the environmental acoustical pollution is properly described (for example  $(L_{10} L_{90})$ ;  $L_{NP}$  to  $TNI$  index) in time interval  $T_i \leq T_{ref}$ . An environmental noise permissible (limited) level is estimated in point of  $L_{den}$  or  $L_d$ ,  $L_e$ ,  $L_n$ .

$$L_{A,eq,x} \leq L_{den} + 10 \log T_i / T_0 \quad (4)$$

where  $T_i \leq \sum t_i$  is the noise exposure time.

When noise source sound radiation intensity is variable at time  $t_i \ll T_i$ , other index for the investigation of an acoustical environmental is used, for example index  $L_{AE}$ .

The second basic quantity is the sound exposure level:

$$L_{AE} = 10 \log \left( \frac{1}{t_0} \int_{t_1}^{t_1+T} \frac{p_A^2(t)}{p_0^2} dt \right) \quad (5)$$

where  $t_0$  is the reference duration (1 s).

The sound exposure level (often abbreviated as *SEL*) may be used to express the energy contents of isolated noise events, for example, planes and like so events can be described by momentary process. Like a process at a start of transport ( $t_i = 0$ ) and motion of time  $t_i$ , is generated by the acoustical signals of intensity  $L_{pA,max}$ . When transport vehicles pass with acceleration an intersection at time interval from 0 till  $T$ , the momentary acoustical signals  $L_{AX}$  are generated. The equation of equivalent sound intensity  $L_{pA,eq}$  is expressed by:

$$L_{eq} = 10 \log \left( \frac{T_{ref}}{T} \sum_i 10^{\frac{L_{AX}}{10}} \right) \quad (6)$$

where  $T_{ref}=1$  s,  $L_{AX}$  is the noise exposure level.

$$L_{AX} = L_{Amax} + \Delta_A \quad (7)$$

where  $\Delta_A$  is duration allowance,  $\Delta = 10 \log \left( \frac{t_2 - t_1}{2T_{ref}} \right)$ ;  $t_2 - t_1$  is time interval.


It can be stated that the investigation of intersection zones of acoustical environment can be fulfilled by using the information in the index  $L_{AN}$  and  $L_{AX}$ .

## Results and discussions

Noise measurements were conducted according to the approved methods (LST ISO 1996-1-2004 „Acoustics.-Description and measurement of environmental noise“ and HN 33-1-2007 „Acoustic Noise. Limit Values of Noise in Residential and Public Buildings and their Environment“) in Kaunas city centre and the area of roads near the camp of Lithuanian University of Agriculture (Fig. 1). Four intersections of different type were selected for the measurements. The highest intensive traffic flow, the low velocity (till 50 km/h) (Fig 1. a, b, d),


the hill (Fig 1. c) was observed at these intersections. Measurements of traffic noise levels were performed only at the green light traffic cycles and at peak hours in the morning. It has been established that the A-weighted measurement scale is the most appropriate procedure to account for the human hearing sensitivity at different frequencies. Using this approach, approximate loudness contours were developed that can be used for practical applications in assessing noise criteria [2].

The A-weighted noise levels in dB(A) were measured using noise level meter 'CEL - 440'. Measurements were performed when wind speed was less than 5 m/s. Noise was measured at a distance 1.5 m from the ground and more than 7.5 m from the walls of the surrounding buildings as recommended by the Lithuanian standard LST ISO 1996-1-2004 „Acoustics.- Description and measurement of environmental noise“.

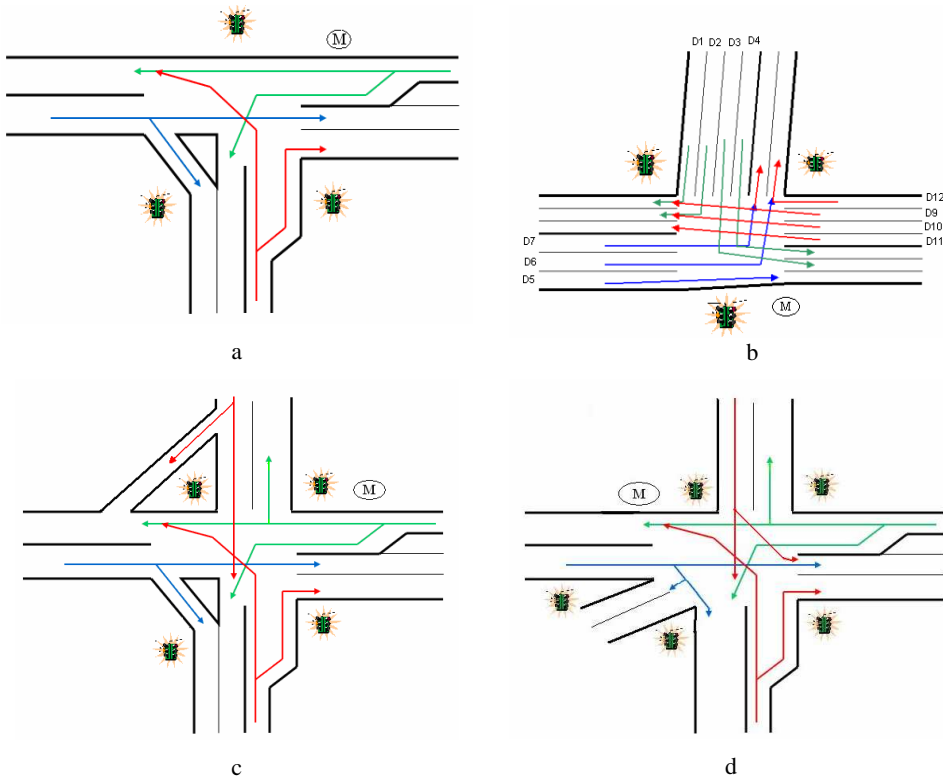


**Fig. 1.** Scheme of street intersections: a - at Gertrudos st. and Birstono st., b - at Karaliaus Mindaugo av. and Birstono st., c, d - near the camp Lithuanian University of Agriculture (M - location of measurements)

Evolution of the  $L_{Aeq}$  levels was recorded during the green traffic signal cycle ( $t = 10$  s). It has been noted that  $L_{Aeq}$  levels almost continuously decrease till the end of the green traffic signal cycle. At the beginning of the green traffic signal cycle, the measured maximum noise level is 97.9 dB(A) and at the end of the cycle minimum noise level is 49,9 dB(A). The maximum noise level was observed at intersection with the hill. Interrupted traffic flow generates higher noise levels due to acceleration (hot-starts) of the vehicles. The intersections are empty of vehicles after 10 s and the background noise is dominant. Measured noise levels at the four intersections are presented in Fig. 2.

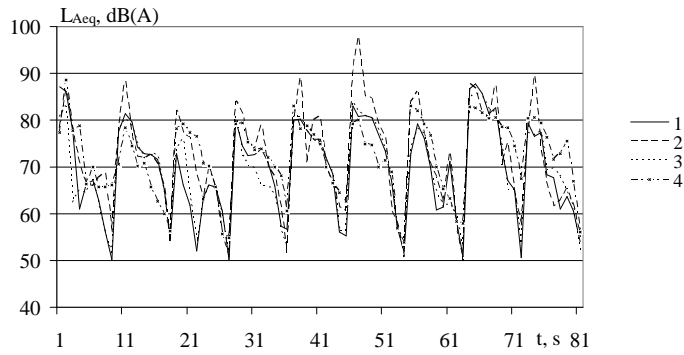

**Fig. 2.** Measured noise level  $L_{Aeq}$  at intersections: 1 - Gertrudos st. and Birstono st., 2 - near the camp Lithuanian University of Agriculture, 3 - Karaliaus Mindaugo av. and Birstono st., 4 - near Ringaudai village

Distribution of noise level  $L_{Aeq}$  measured and calculated is presented in Fig. 3.

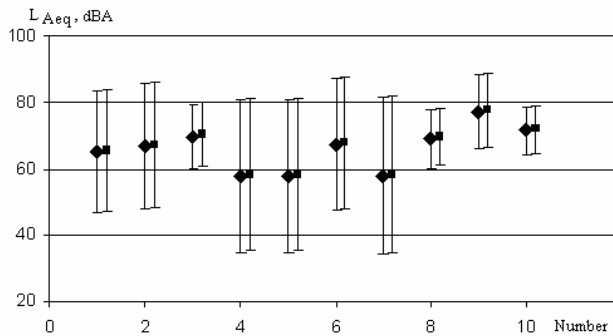

**Fig. 3.** Measured and calculated noise level  $L_{Aeq}$

To evaluate conformity of the mathematical model to the measured of noise levels  $L_{Aeq}$  at the analyzed intersection mathematical statistics was applied: there were compared means of  $L_{Aeq}$  and their 95% CI (Fig. 3) [17]. However, due to nonconformity of data to some minimum requirements, one of which is that data need to be distributed according to Gauss (normal) distribution. The analysis and data indicate that means of noise levels during the green signals are not statistically different and 95% CI are the same. Results of this verification indicate that the developed models possess a good prediction capability.

Analyzed method can provide the information that is required for noise quality transport management systems.

## Conclusions

The developed prediction models enable to estimate simultaneously noise levels using data provided by the automated traffic flow registration system.

It was determined that at the intersections, the  $L_{Aeq}$  levels almost continuously decrease from 97.9 dB(A) to 49.9 dB(A) till the end of the green traffic signal cycle, i.e. noise generated by "hot starts" dominates. The intersections were empty of vehicles after 10 s and the background noise was dominant. Thus, the aim is to minimize interrupted and to maximize continuous intervals of traffic flow in order to reduce noise levels in urban environment.

The measured and calculated noise level  $L_{Aeq}$  analysis indicates that means of noise levels during the green signals are not statistically different and 95% CI are the same. This verification confirmed that the developed models are able to provide reliable predictions.

## References

- [1] **Merkevičius S., Butkus R., Jotautienė E., Vasiliauskas G.** Identification of instantaneous signals of verbal communications. *Journal of Vibroengineering*. Vilnius: Vibromechanika, 2009, Vol. 11(2), p. 316–321.
- [2] **Ilgakojis P., Jotautienė E., Merkevičius S., Bazaras J.** An investigation of infrasonic in traffic flow noise. *Proc. of the XIth Int. Conf. on Urban Transport*. WIT Transactions, 2005, p. 511–520.
- [3] **De Coensel B., Vanhove F., Logghe S., Wilmink L., Botteldooren D.** Noise emission corrections at intersections based on microscopic traffic simulation. *Proc. of the 6th conf. on Eurnoise 2006*, [www.tmlleuven.be/project/Imagine/DeCoenselEurnoise2006](http://www.tmlleuven.be/project/Imagine/DeCoenselEurnoise2006).
- [4] **Morillas J. M. B., Escoba R. V. G., Sierra J. A. M., Gomez R. V.** Study of noise in a small Spanish town. *International Journal of Acoustics and Vibrations*, 2002, Vol. 7(4), p. 231–237.
- [5] **Zurita R., Rarrondo J., Diaz O., Corrales A.** Numerical simulation of the noise distribution due to vehicle traffic in intersections of urban streets. *Proc. of the 12th Int. Cong. on Sound and Vibration*, CD, 8, 2005.
- [6] **Ersoy S., Karatepe Y.** Measurements of noise at crossroads and on transportations, its effects and possible measures to take. *Journal of Vibroengineering*. Vilnius: Vibroengineering, 2011, Vol. 13(1), p. 109–119.
- [7] **Kelessis A. G., Petrakakis M. I., Vogiatzis C., Tzoumaka P., Tsougas M., Koutsari E.** Urban traffic noise monitoring program in the city center of Thessaloniki, Greece. *Proc. of the 12th Int. Cong. on Sound and Vibration*, CD, 8, 2005.
- [8] **Aspuru I., Segues F., Rubio J., Vazquez M.** The process of strategic noise mapping of Spanish major roads (EGRA): first results already available. *Proc. of the 6th Conf. on Eurnoise 2006*, [www.tmlleuven.be/project/Imagine/DeCoenselEurnoise2006](http://www.tmlleuven.be/project/Imagine/DeCoenselEurnoise2006).
- [9] **Jonasson H. G.** Acoustical Source Modeling of Road Vehicles. *Journal of Acta Acustica united with Acustica*, 93(2), 2007, p. 173–184.
- [10] **Affenzelen J., Rust A.** Road Traffic Noise for Today and the Future/ VDA-Technical Congress, 2005, p. 9–48.
- [11] Directive 2002/49/EC of the European Parliament and of the Council, *Official Journal of the European Communities* L 189, 2002.
- [12] **Leonardi F. C.-G.** Environmental assessment in urban settings: road traffic noise in the metropolitan area of the straits of Messina. *Proc. of the 12th Int. Cong. on Sound and Vibration*, CD, 9, 2005.
- [13] **Lian-Feng X., Hi-Gen C.** The traffic noise control in Yangzhou. *Proc. of the 12th Int. Cong. on Sound and Vibration*, CD, 6, 2005.
- [14] **Abo-qudais S., Alhiary A.** Statistical models for traffic noise at signalized intersections. *Journal of Buildings and environment*, 2007, Vol. 42(8), p. 2939–2948.
- [15] **Environmental Noise Measurement.** Technical review. Brüel&Kjær, 2004.
- [16] **Source modeling of road vehicles.** D07\_WP1.1\_HAR11TR-020614-SP05. [www.imagine-project.org](http://www.imagine-project.org).
- [17] **Aksomaitis A.** Theory of probabilities and statistics. Kaunas: Technology, p. 345, 2000. [In Lithuanian].
- [18] **Mikalauskas R., Volkovas V.** Investigation of adequacy of the acoustical field model. – *Mechanika*. –Kaunas: Technologija, 2009, No2 (76), p.46-50.