

21. Fractional order magneto-thermoelasticity in a rotating media with one relaxation time

M. Bachher¹, N. Sarkar²

¹Media Girl's High School, Gobardanga, 24-Pgs (N), West Bengal, India

²Department of Applied Mathematics, University of Calcutta, 92, A.P.C. Road, Kolkata-700 009, India

²Corresponding author

E-mail: ¹mitali.ju08@gmail.com, ²nantu.math@gmail.com

(Received 14 April 2016; accepted 20 May 2016)

Abstract. The theory of generalized thermoelasticity based on the heat conduction equation with the Caputo time-fractional derivative is used to study magneto-thermoelastic response of a homogeneous isotropic two-dimensional rotating elastic half-space solid. The solution for the physical variables is obtained using the normal mode analysis together with an eigenvalue approach technique. Numerical computations are carried out for a hypothetical copper like material the numerical results are illustrated graphically. Some comparisons have been made in the graphical results to show the effect of fractional parameter, magnetic field and the rotation on the field variables.

Keywords: non-Fourier heat conduction, Caputo time-fractional derivative, rotating media, normal mode analysis, eigenvalue approach.

Nomenclature

λ, μ	Lame's constant
ρ	constant mass density of the medium
C_E	specific heat of the solid at constant strain
σ_{ij}	components of the stress tensor
e_{ij}	components of the strain tensor
u_i	components of the displacement vector
e_{kk}	$= e$, cubical dilatation
t	time variable
x, y	space variables
$\bar{\Omega}$	angular velocity of the rotating media
T	absolute temperature
T_0	the temperature of the medium in it's natural state, assumed to be such that $\left \frac{(T-T_0)}{T_0} \right << 1$
k	thermal conductivity
ν	fractional parameter
τ_0	the relaxation time parameters
$\Gamma(\nu)$	the well-known Gamma function
γ	$= (3\lambda + 2\mu)\alpha_T$, a material constant characteristic of the theory
α_T	coefficient of linear thermal expansion
\vec{H}_0	initial magnetic field vector
\vec{E}	induced electric field vector
\vec{h}	induced magnetic field vector
\vec{j}	current density vector
μ_0	magnetic permeability
ε_0	electric permeability
a_0	$= \sqrt{\frac{\mu_0 H_0^2}{\rho}}$, Alfen velocity
c_0	$= \sqrt{c_1^2 + a_0^2}$
c_1	$= \sqrt{\frac{\lambda+2\mu}{\rho}}$

c_2	$= \sqrt{\frac{\mu}{\rho}}$
c	$= \sqrt{\frac{1}{\epsilon_0 \mu_0}}$, speed of light
ϵ	$= \frac{\gamma^2 T_0}{\rho c_E (\lambda + 2\mu)}$
M	$= 1 + \frac{a_0^2}{c^2}$
β	$= \sqrt{\frac{c_0^2}{c_2^2}}$
β_0	$= \sqrt{\frac{\lambda + 2\mu}{\mu}}$
δ_{ij}	Kronecker delta
∇^2	$\equiv \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right)$

1. Introduction

Fractional calculus has been used successfully to modify many existing models of physical processes e.g., chemistry, wave propagation, visco-elasticity, electronics and biology. One can state that the whole theory of fractional derivatives and integrals was established in the second half of the nineteenth century. Various definitions and approaches of fractional derivatives have become the main purpose of many studies. There are some materials (e.g. porous materials, biological materials/polymers and colloids, glassy etc.) and physical situations (like low-temperature, amorphous media and transient loading etc.) where the conventional coupled dynamical theory (CD) [1] based on the classical Fourier's law is unsuitable (see [2] for details). In such cases, one needs to use a generalized thermoelastic (and more generally thermos-viscoelastic) model based on an anomalous heat conduction theory involving fractional time-derivatives, see Ignaczak and Ostoja-Starzewski [3].

Fractional order derivatives have been employed for the description of visco-elastic materials by Caputo and Mainardi [4, 5] and Caputo [6] and they have successfully established the connection between the fractional order derivatives and the linear theory of visco-elasticity. They also have obtained a very good agreement with the experimental results successfully. Some applications of fractional calculus to various problems of mechanics of solids are reviewed in the literatures Rabotnov [7] and Mainardi [8]. A considerable research effort has been extended to study anomalous diffusion that is characterized by the time-fractional diffusion wave equation introduced by Kimmich [9].

Fractional calculus has also been employed in the theory of thermoelasticity. Povstenko [10] has constructed a quasi-static uncoupled thermoelasticity model based on the heat conduction equation with fractional order time derivatives. He has used the Caputo fractional derivative (see [11] for details) and obtained the stress components corresponding to the fundamental solution of a Cauchy problem for the fractional order heat conduction equation in both the one-dimensional and two-dimensional cases. In 2010, a new theory of generalized thermoelasticity in the context of a new consideration of the heat conduction equation with fractional order time derivatives has been proposed by Youssef [12]. The uniqueness of the solution has also been proved in the same work. Youssef and Al-Lehaibi [13] have studied a problem on an elastic half space using this theory. Sherief et al. [14], Ezzat and Fayik [15], Ezzat and El-Karamany [16, 17] and Bachher et al. [18, 19] have also constructed some model in generalized thermoelasticity by using fractional calculus.

Investigation of the interaction between magnetic field and stress and strain in a thermoelastic solid is very important due to its many applications in the field of geophysics, plasma physics and related topics. Especially in nuclear fields, the extremely high temperatures and temperature gradients, as well as the magnetic fields originating inside nuclear reactors, influence their design and operations.

During the second half of 20th century, great attention has been devoted to the study of electromagneto-thermoelastic coupled problems based on the generalized thermoelasticity. The magneto-thermoelastic disturbances generated by a thermal shock in an elastic half-space having a finite conductivity has been investigated by Kaliski and Nowacki [20]. Later Massalas and Dalamangas [21] considered the same problem by taking into account the coupling between the temperature and the strain field. Paria [22, 23] also solved some problems in magneto-elasticity and magneto-thermoelasticity. One can find in [24-34] some other works in generalized magneto-thermoelasticity.

Study of plane thermoelastic and magneto-thermoelastic wave propagation in a non-rotating medium is receiving considerable attention in recent years. It appears that little attention has been paid to the study of propagation of plane thermoelastic waves in a rotating medium using the linear models (L-S, G-L and G-N models) of generalized thermoelasticity. Since most large bodies, like the earth, the moon, and other planets, have an angular velocity, it appears more realistic to study the propagation of plane thermoelastic or magneto-thermoelastic waves in a rotating medium with thermal relaxation. One can see the references [27-31, 35-37] for various study for generalized thermoelastic rotating medium.

In the present paper, the model of the equations of fractional order generalized magneto-thermoelasticity with one relaxation time in a homogeneous isotropic rotating elastic medium is established by using the Caputo time-fractional derivative [14]. The surface of the half-space is taken to be traction free and subjected to a thermal shock. There acts an initial magnetic field parallel to the plane boundary of the half-space. The normal mode analysis [38, 39] technique is applied to obtain the exact expressions for the considered field quantities. The distributions of the considered field variables are represented graphically for a hypothetical material. From the distributions, the wave type heat propagation is found in the medium.

2. Formulation of the problem and governing equations

We shall consider the problem of a homogeneous, isotropic, thermally and electrically conducting elastic half-space ($x \geq 0$) in two-dimensional space. The x -axis is taken as vertically inwards. The whole body is initially at a uniform temperature T_0 . The surface of the half-space is subjected to a thermal shock that is a function of y and t . Thus, all the field variables considered will be functions of the time variable t and of the coordinates x and y . Also the considered field quantities are assumed to be vanished as $x \rightarrow +\infty$. The medium is placed in a magnetic field with constant intensity \vec{H}_0 acting in the z -direction so that $\vec{H}_0 = (0, 0, H_0)$, where H_0 is a constant. Due to the application of this initial magnetic field, there results an induced magnetic field \vec{h} and an induced electric field \vec{E} . We assume that both \vec{h} and \vec{E} are small in magnitude in accordance with the assumptions of the linear theory of thermoelasticity.

The elastic medium is rotating uniformly with an angular velocity $\vec{\Omega} = \Omega \vec{n}$, where \vec{n} is a unit vector representing the direction of the axis of rotation. The displacement equation of motion in the rotating frame of reference has two additional terms [36, 37]:

i) Centripetal acceleration, $\vec{\Omega} \times (\vec{\Omega} \times \vec{u})$ due to time-varying motion only and

ii) Coriolis's acceleration $2\vec{\Omega} \times \vec{u}$ where \vec{u} is the displacement vector. These terms don't appear in non-rotating media.

The simplified linearized Maxwell's equations of electrodynamics for a homogeneous isotropic perfectly conducting slowly moving elastic medium are:

$$\vec{\nabla} \times \vec{h} = \vec{J} + \varepsilon_0 \dot{\vec{E}}, \quad (1)$$

$$\vec{\nabla} \times \vec{E} = -\mu_0 \dot{\vec{h}}, \quad (2)$$

$$\vec{E} = -\mu_0 (\dot{\vec{u}} \times \vec{H}), \quad (3)$$

$$\vec{\nabla} \cdot \vec{h} = 0, \vec{\nabla} \cdot \vec{E} = 0, \quad (4)$$

where $\vec{H} = \vec{H}_0 + \vec{h}$.

All the considered field quantities will depend on spatial coordinate x, y and time t , so that for two-dimensional deformation in the xy -plane:

$$u_i = [u(x, y, t), v(x, y, t), 0], \quad T = T(x, y, t), \quad e = u_{,x} + v_{,y}.$$

The electric intensity vector \vec{E} is normal to both the magnetic intensity filed and the displacement vector. Thus for $\vec{H}_0 = (0, 0, H_0)$, \vec{E} has the components:

$$E_x = E_1, \quad E_y = E_2, \quad E_z = 0. \quad (5)$$

Since the current density vector \vec{J} is parallel to the electric intensity vector \vec{E} , it has the components:

$$J_x = J_1, \quad J_y = J_2, \quad J_z = 0. \quad (6)$$

From Eq. (3), we get after linearization:

$$E_1 = -\mu_0 H_0 \dot{v}, \quad E_2 = \mu_0 H_0 \dot{u}, \quad E_3 = 0. \quad (7)$$

Now, Eqs. (2) and (5) gives:

$$h_1 = 0, \quad h_2 = 0, \quad h_3 = -H_0 e. \quad (8)$$

From Eqs. (1) and (8) we obtain:

$$J_1 = -H_0 (e_{,y} - \varepsilon_0 \mu_0 \ddot{v}), \quad J_2 = H_0 (e_{,x} - \varepsilon_0 \mu_0 \ddot{u}), \quad J_3 = 0. \quad (9)$$

Using Eqs. (8) and (9), we get the components of Lorentz force as:

$$\vec{F} = \mu_0 (\vec{J} \times \vec{H}) = \mu_0 H_0^2 (e_{,x} - \varepsilon_0 \mu_0 \ddot{u}, e_{,y} - \varepsilon_0 \mu_0 \ddot{v}, 0). \quad (10)$$

For a homogeneous isotropic rotating elastic medium placed in a magnetic field with constant intensity \vec{H}_0 , the displacement equation of motion is:

$$\sigma_{ij,j} + F_i = \rho [\ddot{u}_i + \{\vec{\Omega} \times (\vec{\Omega} \times \vec{u})\}_i + \{2\vec{\Omega} \times \vec{u}\}_i]. \quad (11)$$

The heat conduction equation with Caputo time-fractional derivative [14]:

$$k\nabla^2 T = \left(1 + \tau_0 \frac{\partial^\nu}{\partial t^\nu}\right) (\rho C_E \dot{T} + \gamma T_0 \dot{e}), \quad 0 < \nu \leq 1. \quad (12)$$

The constitutive equations are given by:

$$\sigma_{ij} = 2\mu e_{ij} + [\lambda e_{kk} - \gamma(T - T_0)]\delta_{ij}, \quad (13)$$

where:

$$\frac{\partial^\nu}{\partial t^\nu} f(x, t) := \begin{cases} f(x, t) - f(x, 0), & \text{when } \nu \rightarrow 0, \\ I^{1-\nu} \frac{\partial f(x, t)}{\partial t}, & \text{when } 0 < \nu < 1, \\ \frac{\partial f(x, t)}{\partial t}, & \text{when } \nu = 1, \end{cases}$$

the Riemann-Liouville fractional integral operator I^ν is defined as:

$$I^\nu[f(t)] := \frac{1}{\Gamma(\nu)} \int_0^t (t-s)^{\nu-1} f(s) ds,$$

and F_i are the components of the Lorentz force vector \vec{F} . In the above equations, a comma followed by a suffix denotes material derivative and a superposed dot denotes the derivative with respect to time t .

The strain tensor e_{ij} has the components:

$$e_{xx} = u_{,x}, \quad e_{yy} = v_{,y}, \quad e_{xy} = \frac{1}{2}(u_{,y} + v_{,x}), \quad e_{xz} = e_{yz} = e_{zz} = 0. \quad (14)$$

For two-dimensional deformation in the xy -plane, we have:

$$\begin{aligned} & (\lambda + 2\mu + \mu_0 H_0^2)u_{,xx} + \mu u_{,yy} + (\lambda + \mu + \mu_0 H_0^2)v_{,xy} - \gamma T_{,x} \\ &= (\rho + \varepsilon_0 \mu_0^2 H_0^2)\ddot{u} - \rho \Omega^2 u - 2\rho \Omega \dot{v}, \end{aligned} \quad (15)$$

$$\begin{aligned} & (\lambda + 2\mu + \mu_0 H_0^2)v_{,yy} + \mu v_{,xx} + (\lambda + \mu + \mu_0 H_0^2)u_{,xy} - \gamma T_{,y} \\ &= (\rho + \varepsilon_0 \mu_0^2 H_0^2)\ddot{v} - \rho \Omega^2 v - 2\rho \Omega \dot{u}, \end{aligned} \quad (16)$$

$$k(T_{,xx} + T_{,yy}) = \left(1 + \tau_0 \frac{\partial^\nu}{\partial t^\nu}\right)(\rho C_E \dot{T} + \gamma T_0 \dot{e}), \quad (17)$$

$$\sigma_{xx} = \lambda e + 2\mu u_{,x} - \gamma(T - T_0), \quad (18)$$

$$\sigma_{yy} = \lambda e + 2\mu v_{,y} - \gamma(T - T_0), \quad (19)$$

$$\sigma_{xy} = \mu(u_{,y} + v_{,x}). \quad (20)$$

In order to make the Eqs. (15)-(20) dimensionless, the following non-dimension quantities are introduced:

$$\begin{aligned} (x', y', u', v') &= c_0 \eta(x, y, u, v), \quad (t', \tau') = c_0^2 \eta(t, \tau), \\ \theta &= \frac{\gamma(T - T_0)}{\rho c_0^2}, \quad \sigma'_{ij} = \frac{\sigma_{ij}}{\mu}, \quad \Omega' = \frac{\Omega}{c_0^2 \eta}, \quad \eta = \frac{\rho C_E}{k}. \end{aligned} \quad (21)$$

Making use of Eq. (21) into Eqs. (15)-(20), we get (after suppressing the primes):

$$\beta^2 u_{,xx} + u_{,yy} + (\beta^2 - 1)v_{,xy} - \beta^2 \theta_{,x} = \beta^2(M\ddot{u} - \Omega^2 u - 2\Omega \dot{v}), \quad (22)$$

$$\beta^2 v_{,yy} + v_{,xx} + (\beta^2 - 1)u_{,xy} - \beta^2 \theta_{,y} = \beta^2(M\ddot{v} - \Omega^2 v + 2\Omega \dot{u}), \quad (23)$$

$$\nabla^2 \theta = \left(1 + \tau_0 \frac{\partial^\nu}{\partial t^\nu}\right)(\dot{\theta} + \varepsilon \dot{e}), \quad (24)$$

$$\sigma_{xx} = (\beta_0^2 - 2)e + 2u_{,x} - \beta^2 \theta, \quad (25)$$

$$\sigma_{yy} = (\beta_0^2 - 2)e + 2v_{,y} - \beta^2 \theta, \quad (26)$$

$$\sigma_{xy} = u_{,y} + v_{,x}. \quad (27)$$

Let us introduce the displacement potentials φ and ψ by the relations function:

$$u = \varphi_{,x} + \psi_{,y}, \quad v = \varphi_{,y} - \psi_{,x}. \quad (28)$$

$$e = u_{,x} + v_{,y} = \nabla^2 \varphi. \quad (29)$$

By differentiating Eq. (22) with respect to x and Eq. (23) with respect to y , then adding, we obtain:

$$\left[\nabla^2 - M \frac{\partial^2}{\partial t^2} + \Omega^2 \right] \varphi = \theta + 2\Omega\dot{\psi}, \quad (30)$$

and by differentiating Eq. (22) with respect to y and Eq. (23) with respect to x and subtracting we obtain:

$$\left[\nabla^2 - M\beta^2 \frac{\partial^2}{\partial t^2} + \beta^2\Omega^2 \right] \psi = 2\beta^2\Omega \frac{\partial\varphi}{\partial t}. \quad (31)$$

Eq. (24) can be written as:

$$\left[\nabla^2 - \frac{\partial}{\partial t} \left(1 + \tau_0 \frac{\partial^\nu}{\partial t^\nu} \right) \right] \theta = \varepsilon \frac{\partial}{\partial t} \left(1 + \tau_0 \frac{\partial^\nu}{\partial t^\nu} \right) \nabla^2 \varphi. \quad (32)$$

3. Normal mode analysis

The solution of the physical variables can be decomposed in terms of the normal modes [38, 39] in the following way:

$$[\varphi, \psi, \theta, u, v, \sigma_{ij}](x, y, t) = [\varphi^*, \psi^*, \theta^*, u^*, v^*, \sigma_{ij}^*](x) \exp(\omega t + iay), \quad (33)$$

where $u^*(x)$ etc. is the amplitude of the function $u(x, y, t)$ etc., i is the imaginary unit, ω (complex) is the time constant and a is the wave number in the y -direction.

Substituting from Eq. (33) into Eqs. (30)-(32), we arrive at a system of their homogeneous equations:

$$[(D^2 - a^2) - M\omega^2 + \Omega^2]\varphi^*(x) = \theta^*(x) + 2\omega\Omega\psi^*(x), \quad (34)$$

$$[(D^2 - a^2) - \beta^2(M\omega^2 - \Omega^2)]\psi^*(x) = 2\beta^2\omega\Omega\varphi^*(x), \quad (35)$$

$$[(D^2 - a^2) - \omega\omega_0]\theta^*(x) = \varepsilon\omega\omega_0(D^2 - a^2)\varphi^*(x), \quad (36)$$

where:

$$\omega_0 = (1 + \tau_0\omega^*), \quad \omega^* = e^{-\omega t}t^{-\nu} \sum_{n=1}^{\infty} \frac{(\omega t)^n}{\Gamma(n+1-\nu)}. \quad (37)$$

Eliminating $\psi^*(x)$ and $\theta^*(x)$ between Eqs. (34)-(36), we obtain the following sixth order differential equation satisfied by $\varphi^*(x)$:

$$[D^6 - l_1 D^4 + l_2 D^2 - l_3]\varphi^*(x) = 0, \quad (38)$$

Where:

$$l_1 = 3a^2 + g_1, \quad l_2 = 3a^4 + 2a^2g_1 + g_2, \quad l_3 = a^6 + a^4g_1 + a^2g_2 + g_3$$

$$g_1 = (M\omega^2 - \Omega^2)(1 + \beta^2) + \omega\omega_0(1 + \varepsilon),$$

$$g_2 = (M\omega^2 - \Omega^2)[\beta^2(M\omega^2 - \Omega^2) + \omega\omega_0(1 + \beta^2) + \beta^2\varepsilon\omega\omega_0] - 4\beta^2\omega^2\Omega^2,$$

$$g_3 = \beta^2\omega\omega_0[(M\omega^2 - \Omega^2)^2 - 4\omega^2\Omega^2].$$

In a similar manner, we get the following equations:

$$[D^6 - l_1 D^4 + l_2 D^2 - l_3]\psi^*(x) = 0, \quad (39)$$

$$[D^6 - l_1 D^4 + l_2 D^2 - l_3]\theta^*(x) = 0. \quad (40)$$

The general solution of the Eq. (38)-(40) can be obtained as:

$$\varphi^*(x) = \sum_{j=1}^3 A_j \exp(-k_j x), \quad (41)$$

$$\psi^*(x) = \sum_{j=1}^3 B_j \exp(-k_j x), \quad (42)$$

$$\theta^*(x) = \sum_{j=1}^3 C_j \exp(-k_j x), \quad (43)$$

where $k_j, j = 1, 2, 3$ is the root of the following characteristic equation:

$$k^6 - l_1 k^4 + l_2 k^2 - l_3 = 0, \quad (44)$$

and A_j, B_j and C_j are some parameters depending on a and ω .

Substituting from Eqs. (41)-(43) into Eqs. (34)-(36), we get:

$$B_j = d_{1j} A_j, C_j = d_{2j} A_j, d_{1j} = \frac{2\beta^2 \omega \Omega}{k_j^2 - a^2 - \beta^2(M\omega^2 - \Omega^2)}, \quad d_{2j} = \frac{\varepsilon \omega \omega_0 (k_j^2 - a^2)}{k_j^2 - a^2 - \omega \omega_0}.$$

In order to obtain the displacement components u and v , Using Eqs. (33), (41) and (42) in Eq. (28), we obtain:

$$u^*(x) = \sum_{j=1}^3 [-k_j + iad_{1j}] A_j \exp(-k_j x), \quad (45)$$

$$v^*(x) = \sum_{j=1}^3 [k_j d_{1j} + ia] A_j \exp(-k_j x). \quad (46)$$

The stress components can be obtained as:

$$\sigma_{xx}^*(x) = \sum_{j=1}^3 P_j A_j \exp(-k_j x), \quad (47)$$

$$\sigma_{yy}^*(x) = \sum_{j=1}^3 Q_j A_j \exp(-k_j x), \quad (48)$$

$$\sigma_{xy}^*(x) = \sum_{j=1}^3 R_j A_j \exp(-k_j x), \quad (49)$$

where:

$$P_j = \beta_0^2 k_j^2 - a^2(\beta_0^2 - 2) - 2iad_{1j} k_j - \beta^2 d_{2j},$$

$$Q_j = k_j^2(\beta_0^2 - 2) - a^2 \beta_0^2 + 2iad_{1j} k_j - \beta^2 d_{2j},$$

$$R_j = -d_{1j}(k_j^2 + a^2) - 2iak_j, j = 1, 2, 3.$$

4. Application

The normal mode analysis is, in fact, to look for the solution in the Fourier transformed domain. Assuming that all the relations are sufficiently smooth on the real line such that the normal mode analysis of these functions exist. The initial conditions of the problem are taken as homogeneous i.e., $\theta = u = v = 0$ and $\dot{\theta} = \dot{u} = \dot{v} = 0$ at $t = 0$. In order to determine the parameters $A_j(j = 1,2,3)$, we need to consider the boundary conditions at $x = 0$ as following:

i) Thermal boundary condition that the surface $x = 0$ of the half-space $x \geq 0$ subjected to a thermal shock:

$$\theta(x, y, t) = f(y, t) \text{ on } x = 0; \quad (50)$$

ii) Mechanical boundary condition that the surface $x = 0$ of the half-space $x \geq 0$ is traction free:

$$\sigma_{xx}(x, y, t) = 0, \quad (51)$$

$$\sigma_{xy}(x, y, t) = 0 \text{ on } x = 0. \quad (52)$$

Substituting from the expressions of considered variables into the above boundary conditions, we can obtain the following system of equations satisfied by the parameters $A_j(j = 1,2,3)$:

$$\begin{pmatrix} d_{21} & d_{22} & d_{23} \\ P_1 & P_2 & P_3 \\ R_1 & R_2 & R_3 \end{pmatrix} \begin{pmatrix} A_1 \\ A_2 \\ A_3 \end{pmatrix} = \begin{pmatrix} f^* \\ 0 \\ 0 \end{pmatrix}. \quad (53)$$

Solving (53), we obtain the constants A_j as follows:

$$A_1 = \frac{f^*(P_2R_3 - P_3R_2)}{\Delta}, \quad A_2 = \frac{f^*(P_3R_1 - P_1R_3)}{\Delta}, \quad A_3 = \frac{f^*(P_1R_2 - P_2R_1)}{\Delta},$$

where $\Delta = d_{21}(P_2R_3 - P_3R_2) + d_{22}(P_3R_1 - P_1R_3) + d_{23}(P_1R_2 - P_2R_1)$.

5. Numerical results and discussions

With a view to illustrating the analytical procedure presented earlier, we consider now a numerical example. The results depict the variation of the amplitudes of displacements, temperature and thermal stresses. For this purpose, the following values of the different physical parameters of the copper like material were chosen [36]:

$$\varepsilon = 0.0168, \quad \beta^2 = 3.5, \quad \beta_0^2 = 2.01, \quad \tau_0 = 0.02.$$

Let $\omega = \zeta + i\eta$. Then $e^{\omega t} = e^{\zeta t}(\cos\eta t + i\sin\eta t)$. So for small values of t , we can assume $\omega = \zeta$. The other constants of the problem were taken as: $\zeta = 2, \eta = 0.3, a = 1, f^* = 50$.

The computations were carried out for a small value of time $t = 0.1$. The real part of the non-dimensional field quantities $\theta(x, y, t)$, the horizontal displacement $u(x, y, t)$, the vertical displacement $v(x, y, t)$ and the stress components $\sigma_{xx}(x, y, t)$ and $\sigma_{yy}(x, y, t)$ on the plane $y = 0$ are computed for two different values of the fractional parameter $\nu = 0.1, 1.0$ and two different values of rotation $\Omega = 0.5, 0.8$ respectively for $M = 2.5$. The computed numerical results are presented graphically in Figs. 1–10 with respect to a wide range of values of the distance $x(0.0 \leq x \leq 3.0)$. In Figs. 1–5, the dashed-dot line (--) when $\nu = 1.0$ refer to the generalized magneto-thermoelsticity theory with one relaxation time (LS model) in the presence of rotation whereas the solid line (-) for $\nu = 0.1$ refer to the fractional order theory of generalized magneto-thermoelsticity with one relaxation time with rotation. It is also noted that, in Figs. 6–10, the solid line (-) present the curve when $\Omega = 0.5$ and the dashed-dot line (--) represent curve for

$\Omega = 0.8$ for the fractional order theory of generalized thermoelsticity with one relaxation time in the presence rotation and magnetic field.

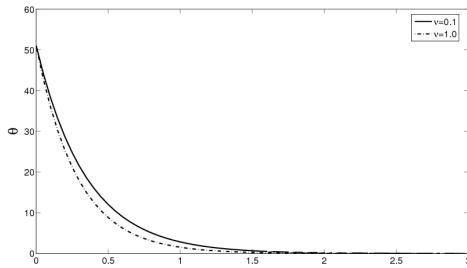


Fig. 1. Temperature distribution
for $y = 0.0, \Omega = 0.5, M = 2.5$

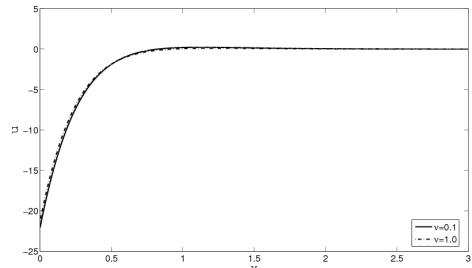


Fig. 2. Horizontal displacement (u) distribution
for $y = 0.0, \Omega = 0.5, M = 2.5$

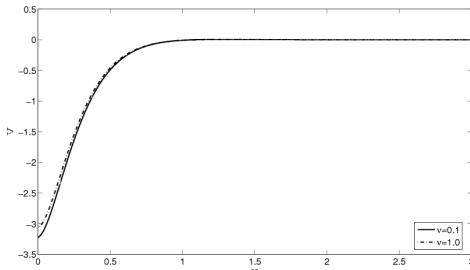


Fig. 3. Vertical displacement (v) distribution
for $y = 0.0, \Omega = 0.5, M = 2.5$

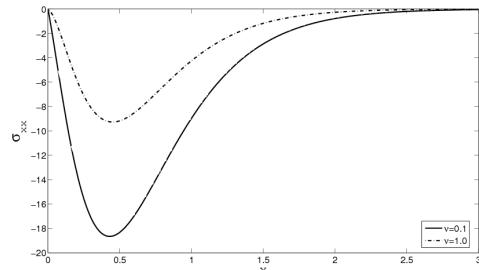


Fig. 4. The distribution of stress σ_{xx}
for $y = 0.0, \Omega = 0.5, M = 2.5$

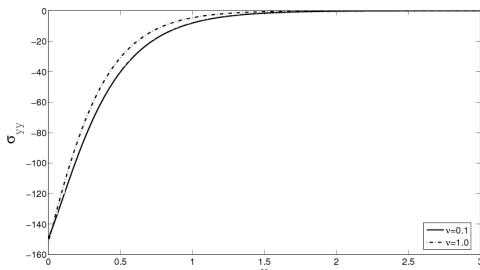


Fig. 5. The distribution of stress σ_{yy}
for $y = 0.0, \Omega = 0.5, M = 2.5$

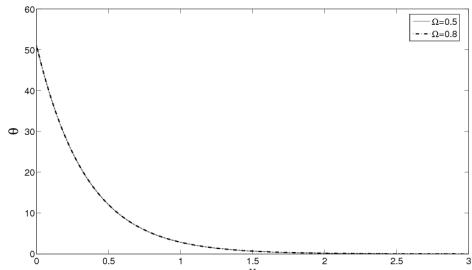


Fig. 6. Temperature distribution
for $y = 0.0, v = 0.5, M = 2.5$

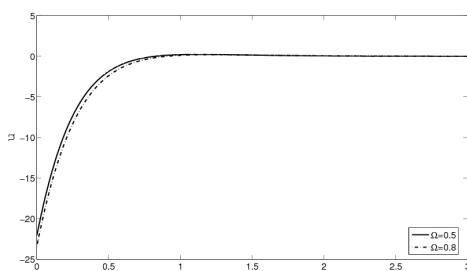


Fig. 7. Horizontal displacement (u) distribution
for $y = 0.0, v = 0.5, M = 2.5$

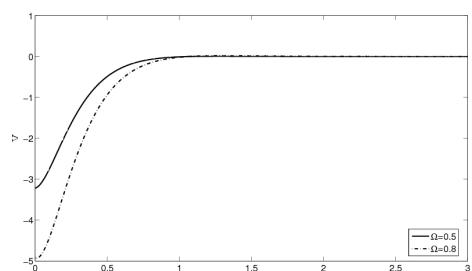


Fig. 8. Vertical displacement (v) distribution
for $y = 0.0, v = 0.5, M = 2.5$

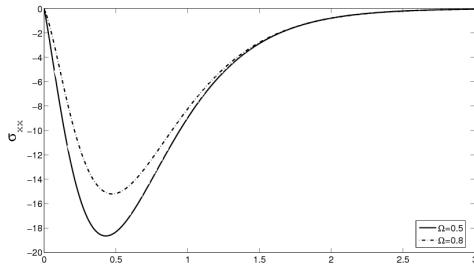


Fig. 9. The distribution of stress σ_{xx} for $y = 0.0, \nu = 0.5, M = 2.5$

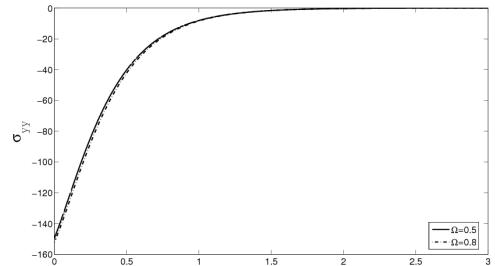


Fig. 10. The distribution of stress σ_{yy} for $y = 0.0, \nu = 0.5, M = 2.5$

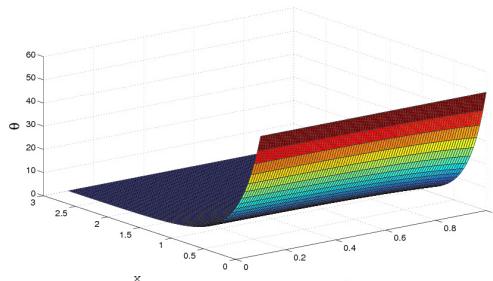


Fig. 11. 3D temperature distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

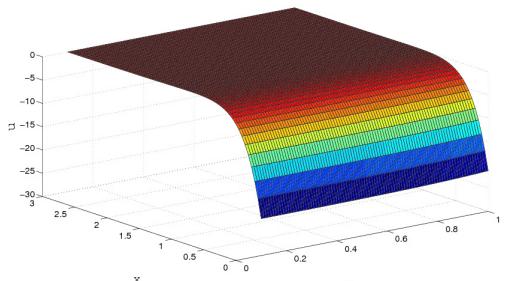


Fig. 12. 3D horizontal displacement (u) distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

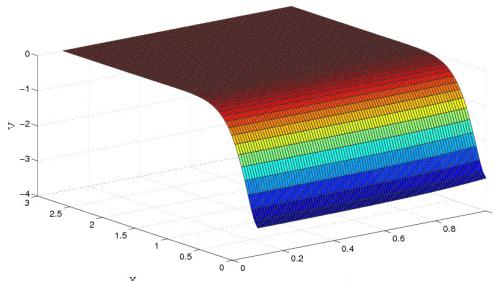


Fig. 13. 3D vertical displacement (v) distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

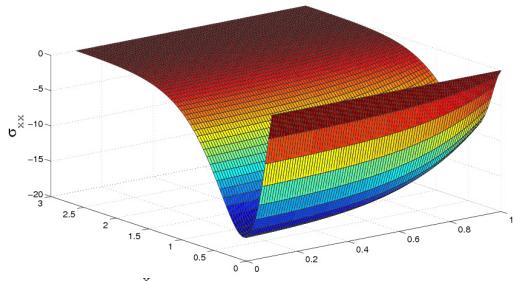


Fig. 14. 3D stress(σ_{xx}) distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

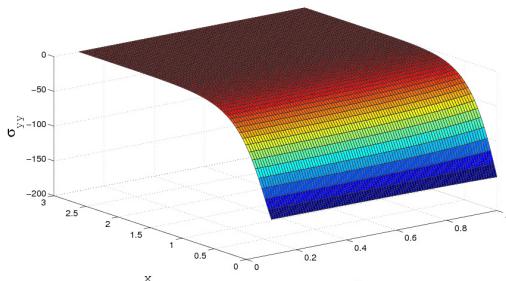


Fig. 15. 3D stress(σ_{yy}) distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

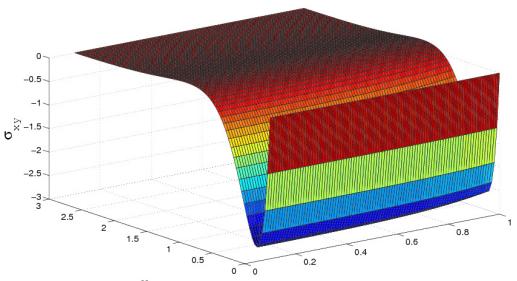


Fig. 16. 3D stress(σ_{xy}) distribution for $y = 0.0, \Omega = 0.5, M = 2.5$

From Fig. 1, it is noticed that the temperature decreases with the increase of value of the fractional order parameter ν . In all the cases, the temperature attains maximum value at beginning, and then continuously decreases to zero. Fig. 2 and 3 shows that the fractional order parameter

acts to decrease the magnitude of the displacement components u and v . Significant changes of the magnitude of u and v can only be noticed in the range $x(0.0 \leq x \leq 0.7)$. From Fig. 4 and 5, it is exhibited that the magnitude of the stresses $\sigma_{xx}(x, y, t)$ and $\sigma_{yy}(x, y, t)$ decrease with the increase of the fractional order parameter ν . All the curves in Figs. 1-5 converge to zero with the increase of x . Figs. 1 and 3 show that the boundary conditions of the problem are satisfied.

Fig. 6 depicts that the rotation Ω has no significant effect on the temperature distribution at $t = 0.1, y = 0, \nu = 0.5, M = 2.5$. From Fig. 7 and 8, we can see that magnitude of the horizontal displacement u and the vertical displacement v increase with the increasing value of Ω and finally goes to zero after $x \geq 1.0$. Fig. 9 presents the variation of stress $\sigma_{xx}(x, y, t)$ with respect to x in which we notice that the magnitude of the stress increases to maximum value within the range $0 \leq x \leq 0.5$, then decrease and finally converge to zero. The rotation has decreasing effect on the magnitude of $\sigma_{xx}(x, y, t)$. Fig. 10 exhibit the variation of $\sigma_{yy}(x, y, t)$ with respect to x for $\Omega = 0.5, 0.8$ on the plane $y = 0$. It is seen that the magnitude of the stress $\sigma_{yy}(x, y, t)$ starts with a maximum value and then decrease to zero with the increase of the distance x . Rotation has a decreasing effect on the magnitude of $\sigma_{yy}(x, y, t)$.

Figs. 11-16 display three-dimensional distributions of the non-dimensional temperature $\theta(x, y, t)$, horizontal displacement u , vertical displacement v and the stresses $\sigma_{xx}(x, y, t)$, $\sigma_{yy}(x, y, t)$ and $\sigma_{xy}(x, y, t)$ for wide range of $x(0.0 \leq x \leq 3.0)$ and $\nu(0.1 \leq \nu \leq 1.0)$ for $t = 0.1, y = 0, M = 2.5$. We have noticed that, the increasing of the value of the parameter ν causes increasing in the speed of the waves propagation of all the studied fields and it vanishes more rapidly.

6. Concluding remarks

The results of the present work present the fractional order generalized magneto-thermoelasticity in a rotating elastic media as a new improvement and progress in the field of generalized thermoelasticity. According to this theory, we have to construct a new classification to all the materials according to its fractional parameter where this parameter becomes new indicator of its ability to conduct the thermal energy. We have seen that the fractional parameter has a decreasing effect on the magnitudes of all the considered physical variables.

References

- [1] **Biot M.** Thermoelasticity and irreversible thermodynamics. *Journal of Applied Physics*. Vol. 27, 1956, p. 240-253.
- [2] **Dreyer W., Struchtrup H.** Heat pulse experiments revisited. *Continuum Mechanics and Thermodynamics*, Vol. 5, 1993, p. 3-50.
- [3] **Ignaczak J., Ostoja-Starzewski M.** *Thermoelasticity with Finite Wave Speeds*. Oxford University Press, New York, 2010.
- [4] **Caputo M., Mainardi F. A.** A new dissipation model based on memory mechanism. *Pure and Applied Geophysics*, Vol. 91, 1971, p. 134-147.
- [5] **Caputo M., Mainardi F. A.** Linear models of dissipation in anelastic solids. *Rivista del Nuovo Cimento*, Vol. 1, 1971, p. 161-198.
- [6] **Caputo M.** Vibrations of an infinite viscoelastic layer with a dissipative memory. *The Journal of the Acoustical Society of America*, Vol. 56, 1974, p. 897-904.
- [7] **Rabotnov Yu N.** *Creep of Structural Elements*. Nauka, Moscow, 1966, (in Russian).
- [8] **Mainardi F.** Applications of fractional calculus in mechanics. *Transforms Method and Special Functions*, Bulgarian Academy of Sciences, Sofia, 1998, p. 309-334.
- [9] **Kimmich R.** Strange kinetics, porous media and NMR. *The Journal of Chemical Physics*, Vol. 284, 2002, p. 253-285.
- [10] **Povstenko Y. Z.** Fractional heat conduction equation and associated thermal stress. *Journal of Thermal Stresses*, Vol. 28, 2005, p. 83-102.

- [11] **Caputo M.** Linear model of dissipation whose Q is almost frequency independent – II Geophysical. Royal Astronomical Society, Vol. 13, 1967, p. 529-539.
- [12] **Youssef H.** Theory of fractional order generalized thermoelasticity. Journal of Heat Transfer, Vol. 132, 2010, p. 1-7.
- [13] **Youssef H., Al-Lehaibi E.** Fractional order generalized thermoelastic half space subjected to ramp type heating. Mechanics Research Communications, Vol. 37, 2010, p. 448-452.
- [14] **Sherief H. H., El-Sayed A., El-Latif A.** Fractional order theory of thermoelasticity. International Journal of Solids and Structures, Vol. 47, 2010, p. 269-275.
- [15] **Ezzat M. A., Fayik M. A.** Fractional order theory of thermoelastic diffusion. Journal of Thermal Stresses, Vol. 34, 2011, p. 851-872.
- [16] **Ezzat M. A., El-Karamany A. S.** Fractional order theory of a perfect conducting thermoelastic medium. Canadian Journal of Physics, Vol. 89, 2011, p. 311-318.
- [17] **Ezzat M. A., El-Karamany A. S.** Theory of fractional order in electro-thermo-elasticity. European Journal of Mechanics – A/Solids, Vol. 30, 2011, p. 491-500.
- [18] **Bachher M., Sarkar N., Lahiri A.** Generalized thermoelastic infinite medium with voids subjected to an instantaneous heat sources with fractional derivative heat transfer. International Journal of Mechanical Sciences, Vol. 89, 2014, p. 84-91.
- [19] **Bachher M., Sarkar N., Lahiri A.** Fractional order thermoelastic interactions in an infinite voids material due to distributed time-dependent heat sources. Meccanica, Vol. 50, 2015, p. 2167-2178.
- [20] **Kaliski S., Nowacki W.** Combined elastic and electro-magnetic waves produced by thermal shock in the case of a medium of finite electric conductivity. International Journal of Engineering Science, Vol. 1, 1963, p. 163-175.
- [21] **Massalas C., Dalamangas A.** Coupled magneto-thermoelastic problem in elastic half-space having finite conductivity. International Journal of Engineering Science, Vol. 21, 1983, p. 991-999.
- [22] **Paria G.** On magneto-thermoelastic plane waves. Mathematical Proceedings of the Cambridge Philosophical Society, Vol. 58, 1962, p. 527-531.
- [23] **Paria G.** Magneto-elasticity and magneto-thermoelasticity. Advances in Applied Mechanics, Vol. 10, 1967, p. 73-112.
- [24] **Ezzat M. A., Youssef H.** Generalized magneto-thermoelasticity in a perfectly conducting medium. International Journal of Solids and Structures, Vol. 42, 2005, p. 6319-6334.
- [25] **Ezzat M. A., Youssef H.** Generation of generalized magneto-thermoelastic waves by thermal shock in a half-space of finite conductivity. Italian Journal of Pure and Applied Mathematics, Vol. 19, 2005, p. 9-26.
- [26] **Youssef H.** Generalized magneto-thermoelasticity in a conducting medium with variable material properties. Applied Mathematics and Computation, Vol. 173, 2006, p. 822-833.
- [27] **Baksi A., Bera R. K., Debnath L.** A study of magneto-thermoelastic problems with thermal relaxation and heat sources in a three-dimensional infinite rotating elastic medium. International Journal of Engineering Science, Vol. 43, 2005, p. 1419-1434.
- [28] **Choudhury Roy S. K., Debnath L.** Magneto-thermoelastic plane waves in rotating media. International Journal of Engineering Science, Vol. 21, 1983, p. 155-163.
- [29] **Choudhury Roy S. K., Debnath L.** Magneto-thermoelastic plane waves in infinite rotating media. Journal of Applied Mechanics, Vol. 50, 1983, p. 283-287.
- [30] **Choudhury Roy S. K., Chattopadhyay M.** Magneto-viscoelastic plane waves in rotating media in the generalized thermoelasticity II. International Journal of Mathematics and Mathematical Sciences, Vol. 11, 2005, p. 1819-1834.
- [31] **Choudhury Roy S. K., Chattopadhyay M.** Magneto-elastic plane waves in rotating media in thermoelasticity of type II (G-N model). International Journal of Mathematics and Mathematical Sciences, Vol. 71, 2004, p. 3917-3929.
- [32] **Akbarzadeh A. H., Babaei M. H., Chen Z. T.** Thermopiezoelectric analysis of a functionally graded piezoelectric medium. International Journal of Applied Mechanics, Vol. 3, 2011, p. 47-68.
- [33] **Brischetto S., Carrera E.** Thermomechanical effect in vibration analysis of one-layered and two-layered plates. International Journal of Applied Mechanics, Vol. 3, 2011, p. 161-185.
- [34] **Xiong Q. L., Tian X. G.** Transient magneto-thermoelastic response for a semi-infinite body with voids and variable material properties during thermal shock. International Journal of Applied Mechanics, Vol. 3, 2011, p. 891-902.
- [35] **Choudhury Roy S. K.** Magneto-thermoelastic plane waves in infinite rotating media. International Journal of Engineering Science, Vol. 22, 1984, p. 519-530.

- [36] **Othman M. I. A., Zidan M. E. M., Hilal M. I. M.** The influence of gravitational field and rotation on thermoelastic solid with voids under Green-Naghdi theory. *Journal of Physics*, Vol. 2, 2013, p. 22-34.
- [37] **Othman M. I. A., Zidan M. E. M., Hilal M. I. M.** Effect of rotation on thermoelastic material with voids and temperature dependent properties of type III. *Journal of Thermoelasticity*, Vol. 1, 2013, p. 1-11.
- [38] **Sarkar N., Lahiri A.** The effect of gravity field on the plane waves in a fiber-reinforced two-temperature magneto-thermoelastic medium under Lord-Shulman theory. *Journal of Thermal Stresses*, Vol. 36, 2013, p. 895-914.
- [39] **Sarkar N.** Analysis of magneto-thermoelastic response in a fiber-reinforced elastic solid due to hydrostatic initial stress and gravity field. *Journal of Thermal Stresses*, Vol. 37, 2014, p. 1-18.